

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International publication date
10 March 2005 (10.03.2005)

PCT

(10) International publication number
WO 2005/021879 A1


- (51) International patent classification⁷: E03C 1/06
- (21) International application number: PCT/EP2004/005591
- (22) International filing date: 25 May 2004 (25.05.2004)
- (25) Language of filing: German
- (26) Language of publication: German
- (30) Data relating to the priority:
103 35 652.5 29 July 2003 (29.07.2003) DE
- (71) Applicant (for all designated States except US):
HANS GROHE AG [DE/DE]; Auestrasse 5-9, 77761
Schiltach (DE).
- (72) Inventor; and
(75) Inventor/Applicant (US only): LORCH, Werner
[DE/DE]; Am Hammergraben 84/1, 78713 Schramberg
(DE).
- (74) Attorney: RUFF, WILHELM, BEIER, DAUSTER
& PARTNER; Kronenstrasse 30, 70174 Stuttgart
(DE).
- (81) Designated states (unless otherwise indicated, for
every kind of national protection available): AE, AG,
AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY,
BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC,
EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,

[continued on next page]

As printed

(54) Title: HOLDING DEVICE FOR A SHOWER ATTACHMENT

(54) Bezeichnung: HALTERUNGSANORDNUNG FÜR EINE BRAUSE

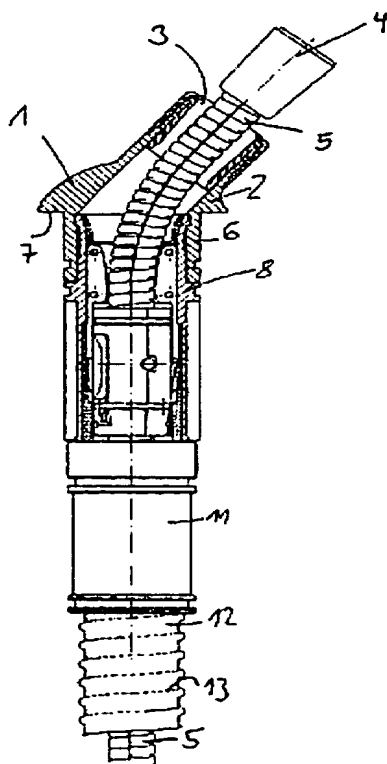

(57) Abstract: A sleeve for a shower hose contains, inside the sleeve, a fixing device, which is designed for permitting the hose to be pulled out in any event but prevents it from being pulled back. In order to release the fixing device, the hose is pulled on a second time so that the next time the hose is pulled back, it can be pulled inward through the sleeve.

(57) Zusammenfassung: Eine Durchführung für einen Brauseschlauch enthält in der Durchführung eine Festlegeeinrichtung, die derart ausgebildet ist, dass sie das Herausziehen des Schlauchs auf jeden Fall zulässt, sein Zurückziehen aber verhindert. Zum Lösen der Festlegeeinrichtung wird ein zweites Mal an dem Schlauch gezogen, so dass er dann beim nächsten Zurückziehen durch die Durchführung nach innen gezogen werden kann.

WO 2005/021879 A1

WO 2005/021879 A1

NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- With International Search Report.

For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.

(84) Designated states (*unless otherwise indicated, for every kind of regional protection available*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent